

CODE NUMBER

3919033

DESCRIPTION

1.5 gpf, Rough Brass Finish, Single Flush, 12.75 L Dimension, Royal® Concealed Manual Urinal Flushometer.

DETAILS

Flush Volume: 1.5 gpf (5.7 Lpf)Finish: Rough Brass (RB)

• Valve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: UrinalFixture Connection: Top

• Rough-In Dimension: 13 ½" (343mm)

Spud Coupling: ³/₄" (19mm)
Supply Pipe: ³/₄" (19mm)

• L Dimension: 12 3/4" (324mm) (12-3/4-LDIM)

FEATURES

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Vacuum Breaker
- Metal Non-Hold-Open Push Button
- Elbow Flush Connection and Coupling for 3/4" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance



COMPLIANCES & CERTIFICATIONS





(cUPC Certified, BAA Compliant)

RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

VALVE OPERATING PRESSURE (FLOWING)

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- Sloan Stainless Steel Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Royal Flushometers Repair and Maintenance Guide
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 613 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.



ROUGH-IN

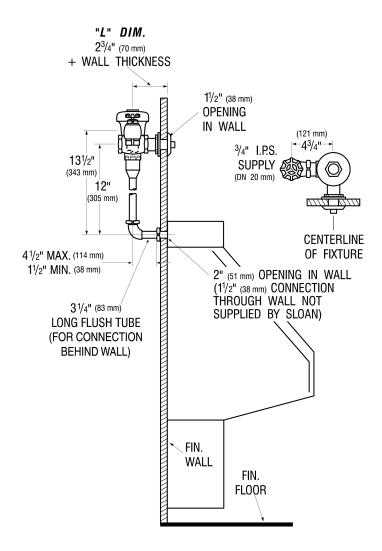

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com