

Features

- Framed
- 1/8" glass
- Towel bar
- Out-of-plumb adjustability
- Tempered glass ensures maximum safety and durability
- Anodized aluminum prevents rusting and corrosion

Installation

- Not for use in hospitality.
- For residential use only.

Included Components

Additional Components:
Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

S

Available Glass Options

Code Description

Pebbled

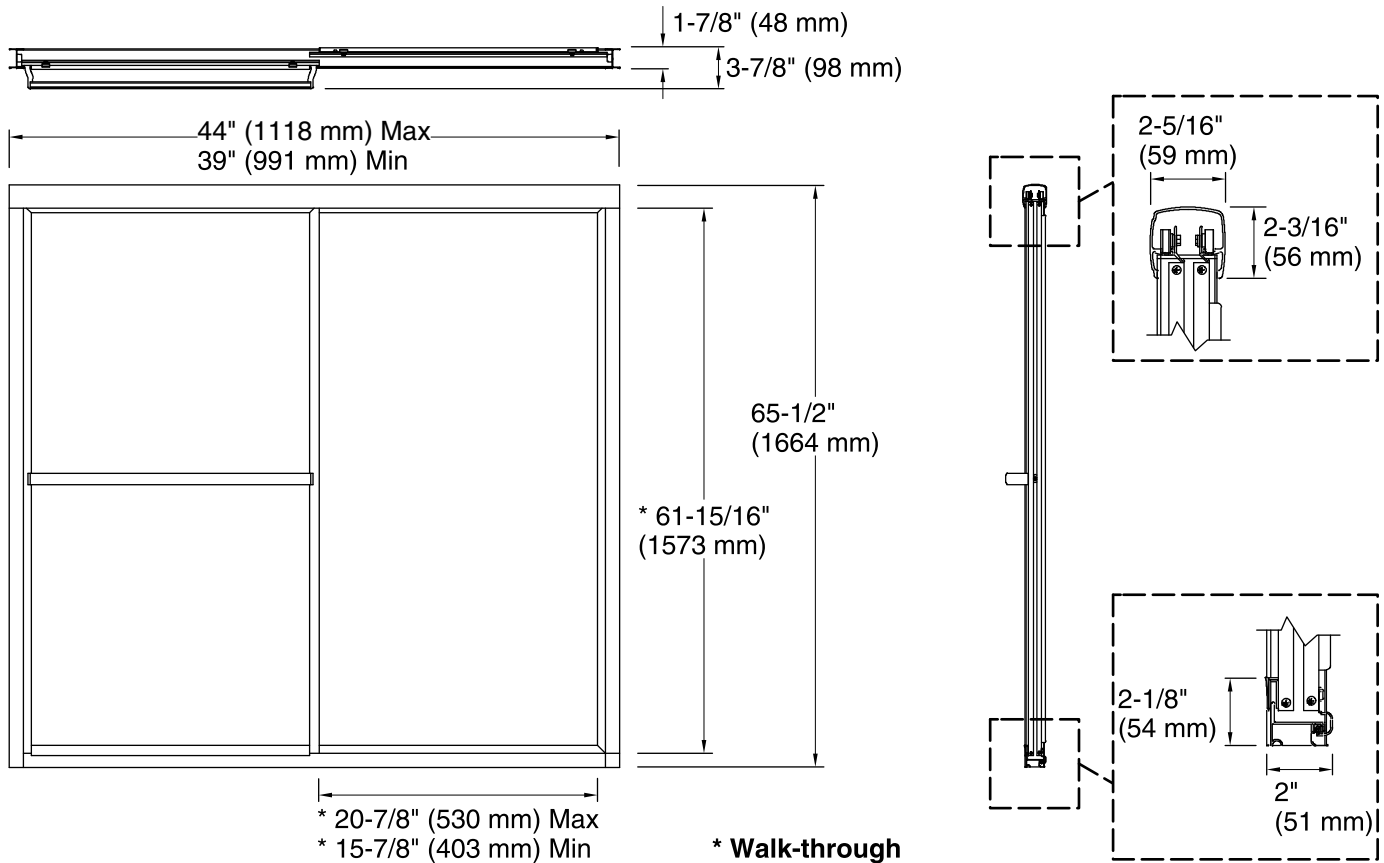

Technical Information

All product dimensions are nominal.
 Installation type: For shower base installation
 Opening Width - Min: 39" (991 mm)
 Opening Width - Max: 44" (1118 mm)
 Walk-through - Min: 15-7/8" (403 mm)
 Walk-through - Max: 20-7/8" (530 mm)
 Glass thickness: 1/8" (3 mm)

Notes

Install this product according to the installation guide.
 The vertical opening should be a minimum of 67" (1702 mm) to allow for installation clearance.