
4-143 Allura® Shower Head

Symmons Allura three mode shower head with full shower, pulsating massage and soft shower water saving spray and standard female ball joint connection.

Modifications:

Suffix 1.5: © 1.5 gpm (5.7 L/min) flow rate restrictor Suffix 1.75: © 1.75 gpm (6.6 L/min) flow rate restrictor Suffix 2.0: 2.0 gpm (7.6 L/min) flow rate restrictor



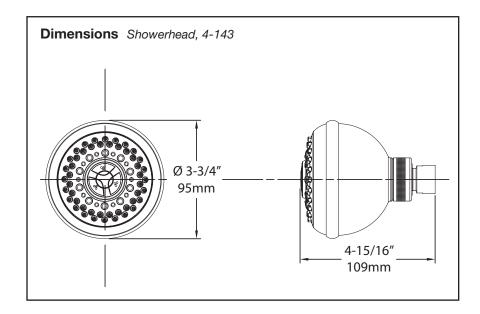

SYMMONS PRODUCTS MEET ASME A112.18.1/CSA B125.1 WaterSense: 1.5 gpm, 1.75 gpm & 2.0 gpm



lob/Location

Job/ Location
Engineer
Contractor

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. • 31 Brooks Drive • Braintree, MA 02184

Phone: (800) 796-6667 • Fax: (800) 961-9621

Website: symmons.com ■ Email: gethelp@symmons.com

