

The Aspen Wedge outdoor wall sconce creates a tapered rectilinear column of beautifully diffused light that can be mounted with the wedge angled up or down. The Aspen Wedge is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for way-finding and general outdoor illumination. The Aspen Wedge features energy-efficient, fully dimmable integrated LED lamping. Available in two finishes: Bronze and Charcoal.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing
- IP-65 Rated

SPECIFICATIONS

DELIVERED LUMENS	1508
WATTS	48
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U4-G2
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	9 lbs.










shown in charcoal

ORDERING INFORMATION

7000WASPW	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	927 90 CRI, 2700K 930 90 CRI, 3000K	36 36"	D DIFFUSE	Z BRONZE H CHARCOAL	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION






Aspen Wedge 36

PHOTOMETRICS*

*For latest photometrics, please visit www. techlighting.com/OUTDOOR

ASPEN WEDGE 36

Total Lumen Output: 1508
Total Power: 48
Luminaire Efficacy: 31
Color Temp: 3000K
CRI: 90
BUG Rating: B0-U4-G2

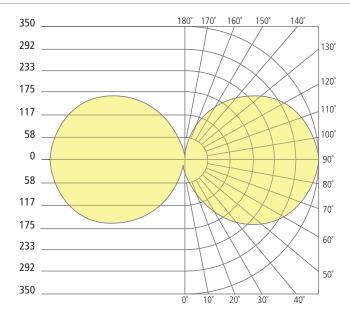

PROJECT INFO



GENERATION BRANDS 7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400 F 847.410.4500

